

Product Code	Description
JC801HDMI-W	1 Gang HDMI Socket Outlet



JC801HDMI-W-LWH



Product back view

Technical Specification

Connector Electrical Specification:

- Operation Voltage: 40VAC max
- Current Rating: 0.5A per contact
- Contact Resistance: 30mΩ max.
- Insulation Resistance: 2000MΩ min.
- Dielectric Withstanding Voltage: 500VAC

Connector Material Specification:

- Shield: Brass
- Plating: Nickle
- Contact: Phosphor Bronze
- Contact area: Gold plating
- Solder Tail: Tin plating

General Specification:

- Operating temp.: -20°C~+85°C
- Fix Centre: 60.3 mm
- Fix Screw: M3.5 x 0.6 x 25mm±


With Lavina '95 Frame: JC1401

- Dimensions: 95x95x10mm (WxHxD)
- Mounting box: >40mm depth*
 - J1040, flush mounting, plastic
74.5 x 74.5 x 42mm (W x H x D)
 - M1050, flush mounting, metal
75.5 x 64 x 50mm (W x H x D)


*Allow room for bend radius of cable



Note: HDMI connector does not have "version" unlike cable which affects the bandwidth of the connection.

Product dimensions (mm)

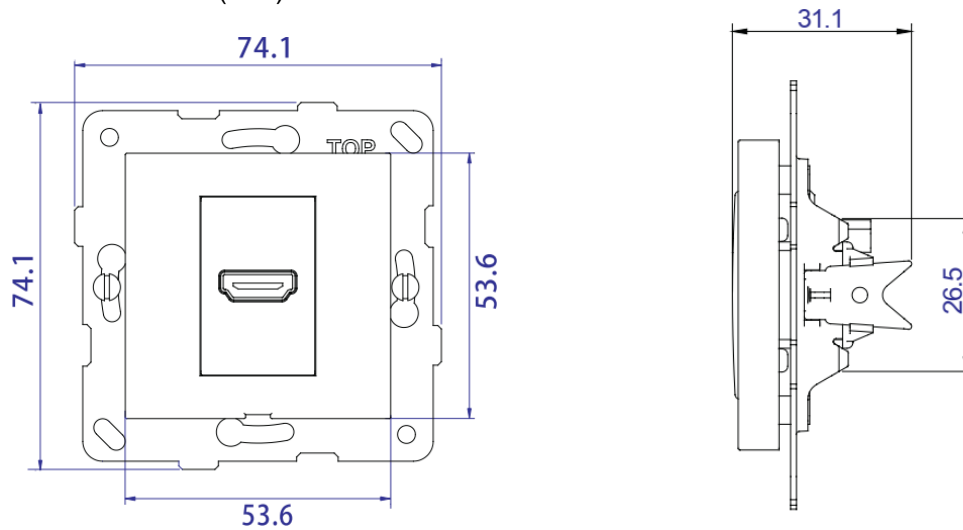

Single-gang Assembly

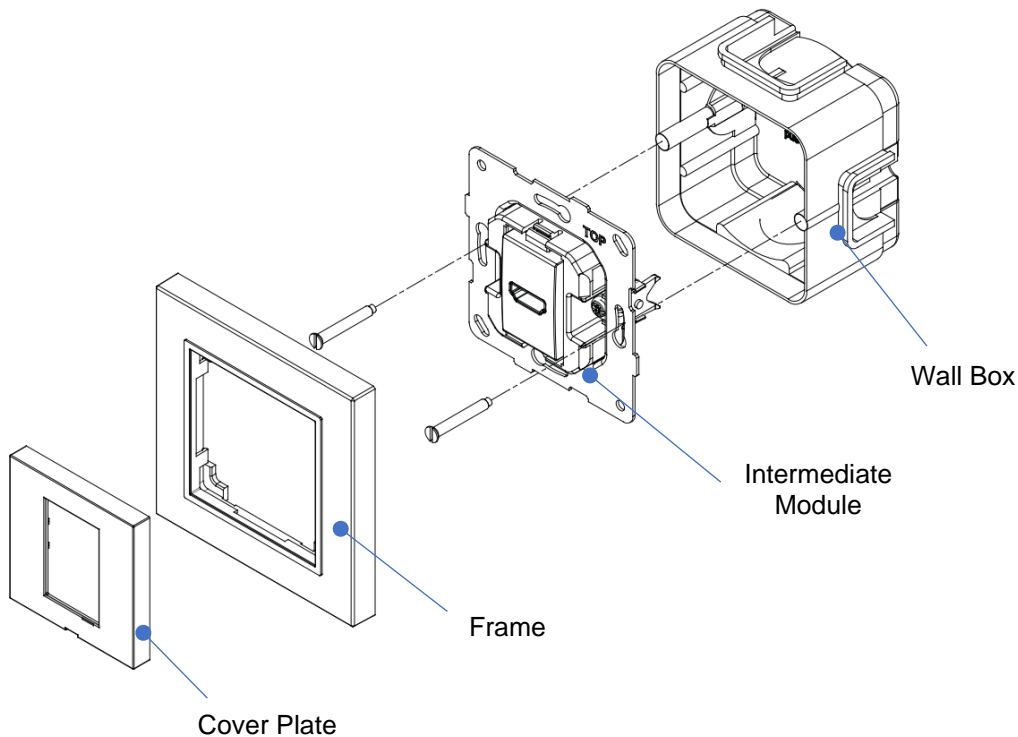

Product Code	Colour
JC801HDMI -W-LWH	 Matt White
JC801HDMI-W-LBL	 Matt Black
<i>For other colours, please contact T&J Sales representative</i>	