

Product Code	Description
JC811USBA-W	2A 240V USB Charger



JC811USBA-W-LWH



Product back view

Technical Specification


- Input Voltage: 100-240VAC, 50/60Hz
- Input Current: 500mA max.
- Output: 5VDC, 2A max.
- Protection: Overload, short-circuit, over-heat protected
- Recommended wire size:
 0.5mm² 1.5mm²
- Fix Centre: 60.3 mm
- Fix Screw: M3.5 x 0.6 x 25mm±


With Lavina '95 Frame: JC1401

- Dimensions: 95x95x10mm (WxHxD)
- Mounting box: >40mm depth
 - J1040, flush mounting, plastic
 74.5 x 74.5 x 42mm (W x H x D)
 - M1050, flush mounting, metal
 75.5 x 64 x 50mm (W x H x D)
- Comply to Standards:
 BSEN 60950-1/IEC 62368-1
 GB 4943.1-2011




Product dimensions (mm)





Single-gang Assembly

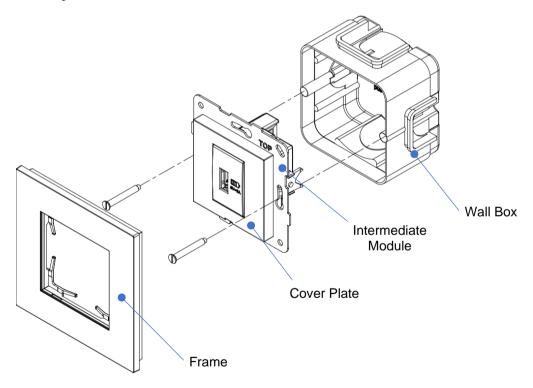

Product Code	Colour	
JC811USBA -W-LWH	Matt White	
JC811USBA-W-LBL	Matt Black	
For other colours, please contact T&J Sales representative		