

T&J ELECTRIC (SINGAPORE) PTE LTD

Company Registration No: 200205797Z
10 Ubi Crescent, #02-24, Ubi Techpark, Singapore 408564
Telephone: +65 6547-4333 Fax: +65 6547-4666

Date: June 7, 2005

Subject: Product Info: K2-AL (Panic Button)

Features:


- K2-AL is a panic button; it shall activate an alarm signal to security system when central red button is pressed.
The alarm signal shall be maintained until released by means of a provided key as shown on the picture.
- Made from premium quality polycarbonate.
- A new product in Radiance Series.



K2-AL (Front)

Technical Data:

- Dimension of central red button:
25.8 mm
- Output point:
A form-C contact. (one NC and one NO contact with one common terminal).
Rated Current: 3A 250V AC.
- Dimension:
86 * 86 mm
- Fix Center:
60.3 mm
- Fix Screws:
M3.5 * 18 mm
- Mounting Box: 25 mm depth or higher
B1125 (for surface mounting)
M1025 (for flush mounting)
- Package: 10 pcs per box, 100 pcs per carton

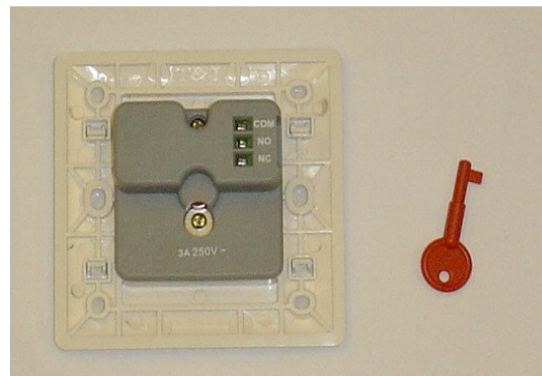

K2-AL (Back)