

T&J ELECTRIC (SINGAPORE) PTE LTD


Company Registration No: 200205797Z
10 Ubi Crescent, #02-24, Ubi Techpark, Singapore 408564
Telephone: +65 6547-4333 Fax: +65 6547-4666

Date: Oct 20, 2005


Subject: Product Info: K2-SV, K2-V (TM-020009)

Features:

- K2-SV - Channel Selector with Volume Control.
The user can select one of four audio channels and adjust the volume with K2-SV module.
- K2-V – Volume Controller.
Same function as K2-SV with exception on the Channel Selector.

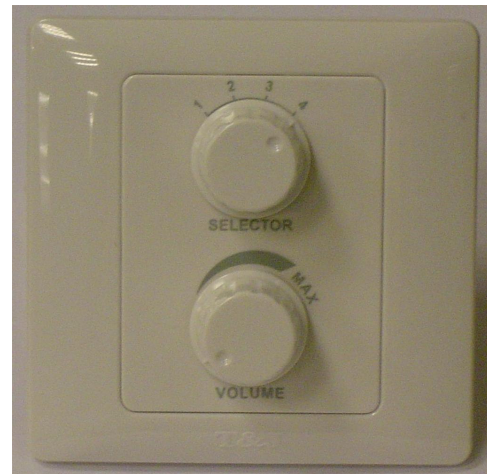

Front View of K2-SV

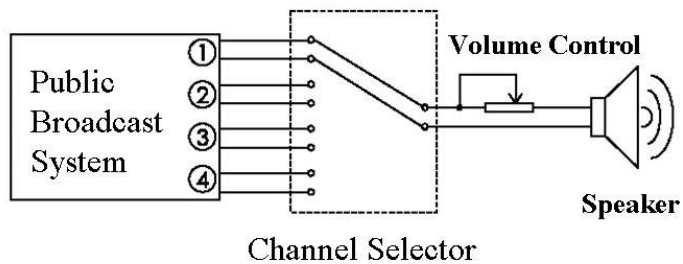

Functional Diagram of K2-SV, K2-V

Technical Data:

- Input: Mono type Audio signal
- Output: Mono type audio signal with a 50K ohm potentiometer as volume control.

T&J ELECTRIC (SINGAPORE) PTE LTD


Company Registration No: 200205797Z
10 Ubi Crescent, #02-24, Ubi Techpark, Singapore 408564
Telephone: +65 6547-4333 Fax: +65 6547-4666

Date: Oct 20, 2005

Subject: Product Info: K2-SV, K2-V (TM-020009)

- Product Range: Radiance
All color code for Radiance are applicable on this product.
Replaceable Frame: K1158, K1258, K1167R.
- Operating temperature: -5°C to +40°C
- Dimension: 86 * 86 mm
- Fix Center: 60.3 mm
- Fix Screws: M3.5 * 18 mm
- Mounting Box: 35 mm depth or higher
B1135 (for surface mounting)
M1035 (for flush mounting)
- Package: 10 pcs per box, 100 pcs per carton

Installation and wiring Diagram:

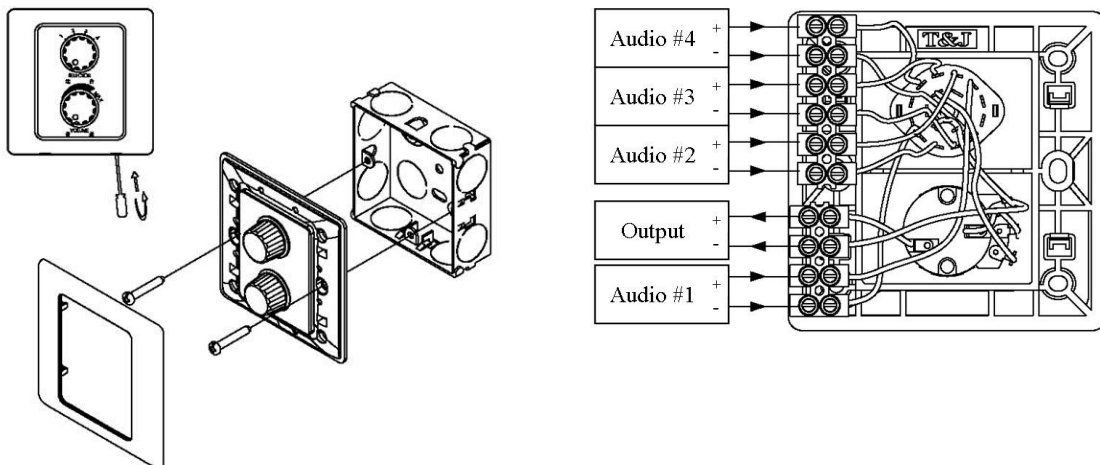

T&J ELECTRIC (SINGAPORE) PTE LTD

Company Registration No: 200205797Z
10 Ubi Crescent, #02-24, Ubi Techpark, Singapore 408564
Telephone: +65 6547-4333 Fax: +65 6547-4666

Date: Oct 20, 2005





Subject: Product Info: K2-SV, K2-V (TM-020009)

Installation:

- Remove the frame
- Connect audio wire on the terminal block accordingly
- Fix K2-SV or K2-V on the wall box
- Install the frame

Remark:

- Ensure the proper connection on the "+" and "-" terminal.

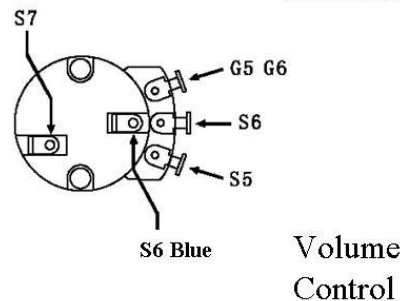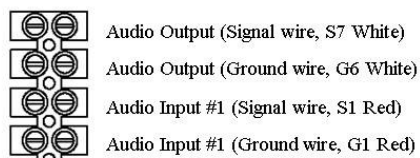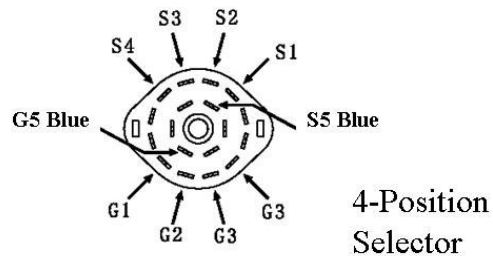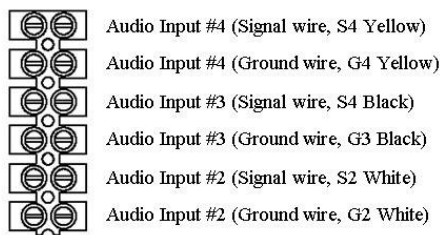


Terminal on K2-SV

T&J ELECTRIC (SINGAPORE) PTE LTD

Company Registration No: 200205797Z
10 Ubi Crescent, #02-24, Ubi Techpark, Singapore 408564
Telephone: +65 6547-4333 Fax: +65 6547-4666

Date: Oct 20, 2005

Subject: Product Info: K2-SV, K2-V (TM-020009)

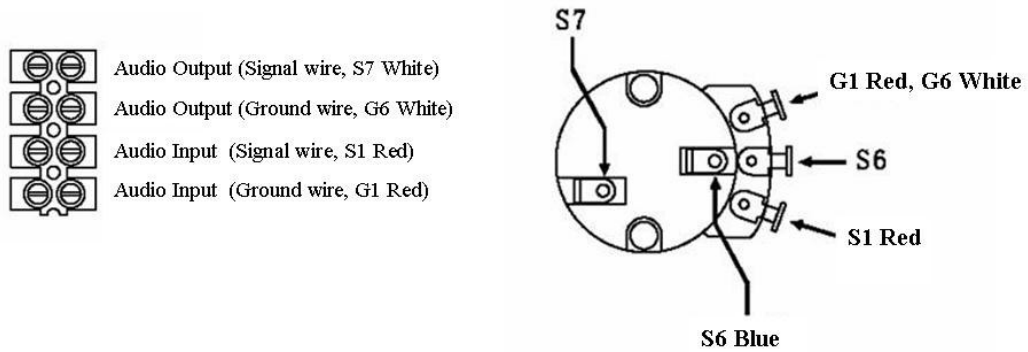

Terminal on K2-V